




**PL 3D Q 5-15-15 Black touch 1/Silver**  
2600 x 1000 / NA 12384 / SA 12549


PR

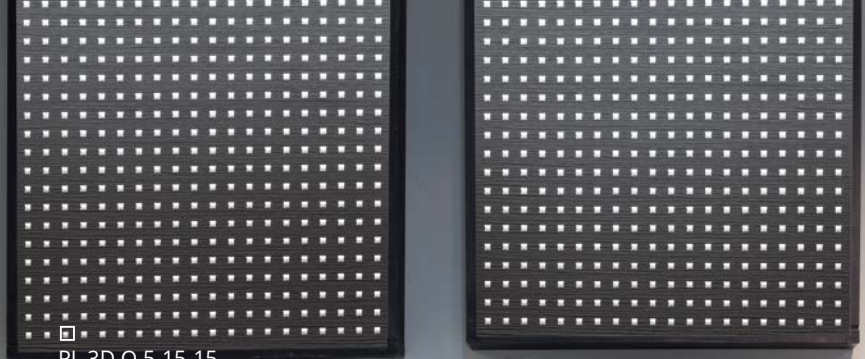

PL 3D Q 5-15-15  
Black touch 1/Silver



2600 x 1000

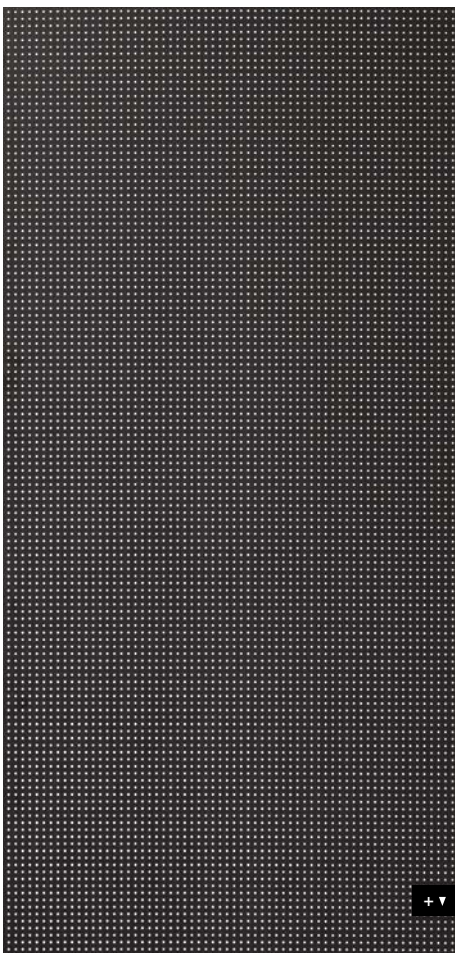

## PUNCH-LINE / 3D

# PL 3D Q 5-15-15

### Product characteristics

|                       | NA          | SA   |
|-----------------------|-------------|------|
| Base material         | APET / HIPS |      |
| Surface material      | Print       |      |
| Material thickness mm | 1,3         | 1,43 |
| Temperature stability | up to 50 °C |      |
| Wet room suitability  | ■■■■□       |      |
| Abrasion resistance   | ■■■■■■■     |      |
| Rolled packable *     | ✓           | ✓    |

### Processing

|                            | NA     | SA     |
|----------------------------|--------|--------|
| Cutting, punching          | ✓      | ✓      |
| Drilling                   | ✓      | ✓      |
| Sawing, milling            | ✓      | —      |
| Laser cutting              | ✓      | ✓      |
| Hot bending                | ✓      | —      |
| PVA compressible           | —      | —      |
| Smallest bending radius ** | 300 mm | 300 mm |

\* Design sheets are to be rolled with the patterned side on the inside (applies for both the NA and SA versions).  
We recommend that not more than 3 sheets be rolled per carton (480 x 480 mm). (Up to 40° C)

\*\* Up to 40° C

### Extra equipment

|                        | NA | SA |
|------------------------|----|----|
| Special formats        | —  | —  |
| Further thicknesses    | —  | —  |
| Cuttings               | ✓  | ✓  |
| Magnetic from 3 sheets | ✓  |    |
| PVA pre-treatment      | —  | —  |

### Accessories

|         |   |
|---------|---|
| SIBUKLE | — |
|---------|---|

### Special colors

|            |
|------------|
| On request |
|------------|